## (19) World Intellectual Property Organization

International Bureau





(43) International Publication Date 1 July 2004 (01.07.2004)

**PCT** 

## (10) International Publication Number WO 2004/055332 A1

- (51) International Patent Classification7: F01D 5/14, 5/28
- (21) International Application Number:

PCT/EP2003/014176

(22) International Filing Date:

10 December 2003 (10.12.2003)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data: MI2002A002677

18 December 2002 (18.12.2002) IT

- (71) Applicant (for all designated States except US): NUOVO PIGNONE HOLDING S.P.A. [IT/IT]; Via F. Matteucci, 2, I-50127 Firenze (IT).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): COPPOLA, Alessandro [IT/IT]; Via A. Righi, 60, I-59100 Prato (IT). INNOCENTI, Marco [IT/IT]; Via Crocetta e Sammommé 1/a, I-51100 Pistoia (IT).


- (74) Agents: COPPO, Alessandro et al.; Ing. Barzanó & Zanardo Milano S.p.A., Via Borgonuovo, 10, I-20121 Milano (IT).
- (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (regional): ARIPO patent (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

## Published:

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

[Continued on next page]

(54) Title: MANUFACTURING METHOD FOR OBTAINING HIGH-TEMPERATURE COMPONENTS FOR GAS TURBINES AND COMPONENTS THUS OBTAINED

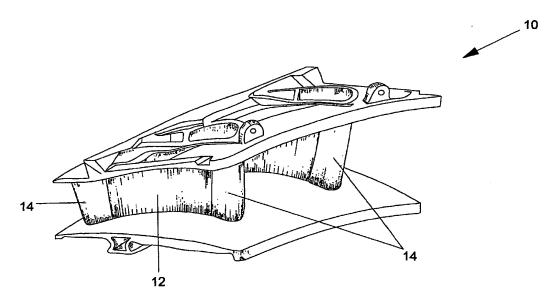

(57) Abstract: A manufacturing method for obtaining high-temperature components (10) for gas turbines, which comprises at least incorporation of an element or insert (14) in a main body (12) of the component (10), this element or insert (14) having mechanical properties able to withstand stresses to which said component (10) is subject in a zone where the said element or insert (14) is arranged; the invention also relates to a high temperature component thus obtained.